


HERZ cyklón pre FM 90 - BF 1000


Technický podklad

Vydanie 09/12


BM220-250

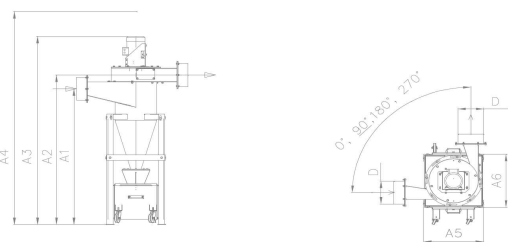


BM300-500

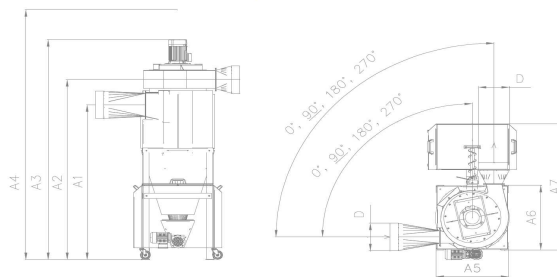


BF500

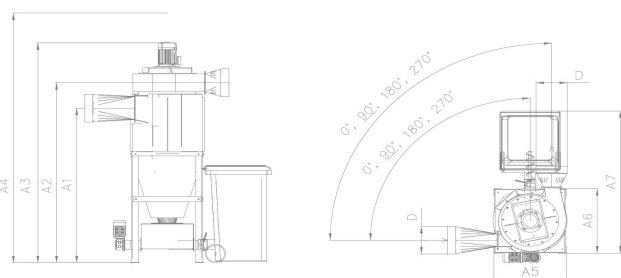

BF600-800-1000

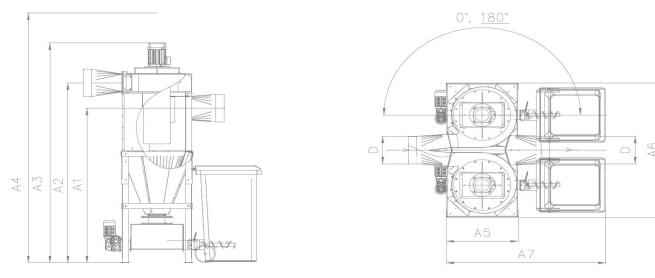

	Odlučovač TZL	BioMatic 220-250	BioMatic 300-500	BioFire 500	BioFire 600- 800	BioFire 1000
A1	Výška dymovodu - vstup do cyklóna	1480	1690	1690	1690	1890
A2	Výška dymovodu - výstup z cyklóna	1630	1965	1965	1965	2165
A3	Celková výška	2055	2400	2400	2400	2600
A4	Min. výška miestnosti	2250	2600	2600	2600	2600
A5	Šírka cyklónu	570	700	700	700	700
A6	Dĺžka cyklónu	570	850	580	1460	1460
A7	Šírka celková	1370	1370	1550	1550	1550
D	Priemer dymovodu vstup, resp. výstup z cyklóna	250	300	300	300	300



	Hmotnosť [kg]	225	275	275	625	630
	Elektr. pripojenie [V,H,z,A] / príkon [kW]	1x1,5	1x3,0	2x3,0	2 x 3,0	2 x 3,0
	Objem zásobníka na popol	90	275	240	2 x 240	2 x 240
	Namerané hodnoty					
	Objemový prietok (pri 10Hz) [m³/h]	282	534	534	534	1068
	Objemový prietok (pri 30 Hz) [m³/h]	883	1577	1577	1577	3154
	Objemový prietok (pri 50 Hz) [m³/h]	1855	2646	2646	2646	5292
	Stupeň odlučovania (pri 30 Hz) [%]	>60	>60	>60	>60	>60
	Stupeň odlučovania (pri 50 Hz) [%]	>65	>65	>65	>65	>65
	Podtlak pred cyklónom (pri 10 Hz) [Pa]	16	63	63	63	63
	Podtlak pred cyklónom (pri 30 Hz) [Pa]	180	540	540	540	540
	Podtlak pred cyklónom (pri 50 Hz) [Pa]	470	1440	1440	1440	1440

